

item #	
model #	
project #	
sis#	
aia #	



HOLD HCT162E Ventilated cold holding cabinet

CONSTRUCTION FEATURES

- Chamber with radiused corners and removable side racks to facilitate cleaning
- All-around rubber bumpers
- Highly efficient and thick insulation, casing injected with CFC-free polyurethane foam
- Ergonomic and fully built-in door handles with magnetic closure
- Cooling process through monobloc cooling unit with evaporator
- Environmentally sustainable monobloc cooling unit with gas R290
- Mounted on four 150mm diameter castors, two of which with brake
- Ergonomic handles for pushing and guiding
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES

- Electronic temperature control with defrosting programme
- Simplified, user-friendly controls
- Operating temperature 0°C / +10°C

STANDARD SUPPLY

• Removable GN2/1 and GN1/1 tray racks

OPTIONS & ACCESSORIES


☐ Grids ☐ Trays



TECHNICAL INSTALLATION DIAGRAM


Electricity supply cable inlet



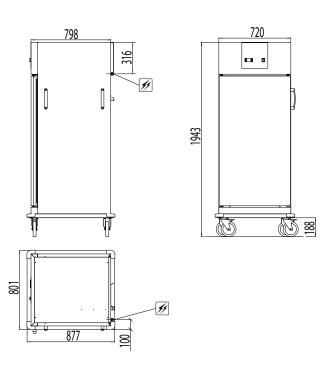

Overall dimensions (W x D x H) - mm	801 x 877 x 1943h	Power * [kW]	0,23 0,2
Trays capacity	16 x GN 2/1 32 x GN 1/1	Amps. * [A]	1 1,5
Distance [mm]	68	Cooling capacity * [W]	300 430
Plates capacity	64 ø 200-260 32 ø 270-320	Working temperature [°C]	0 ÷ 10
Power supply *	AC 230V 50Hz AC 220-240V 50/60Hz	Product max capacity [Kg]	96
Climate class	5	Net weight [Kg]	120

^{*} Values are defined by the cooling unit of the machine

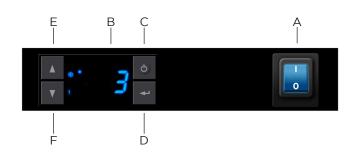

- A ON/OFF switch
- B Display
- C Functions key
- D Enter key
- E Temperature increase key
- F Temperature decrease key

MODULINESRL